



LED LINEAR FIXTURE

DUPLO Series

The DUPLO series LED luminaires are meticulously crafted to deliver consistent and uniform illumination across work surfaces, especially in environments where visual precision and comfort are paramount.

Designed to cast powerful light over expansive areas, even when mounted at a low height, the DUPLO luminaires excel in minimizing shadows.

Constructed from durable aluminum, these luminaires are coated with electrostatic paint, allowing customization in any RAL color to seamlessly integrate into diverse aesthetics.

The series offers models with lighting in various color temperature options, from 2700K to 6500K, achieving an impressive efficacy of up to 176lm/W and luminous flux up to 53936lm.

Each luminaire in the DUPLO series comes with a 5-year warranty, providing assurance of both performance and durability.

DALI

0-10V


Em 3h

BLUE
TOOTH

DIM to
WARM

TUNABLE
CCT

Dimensions

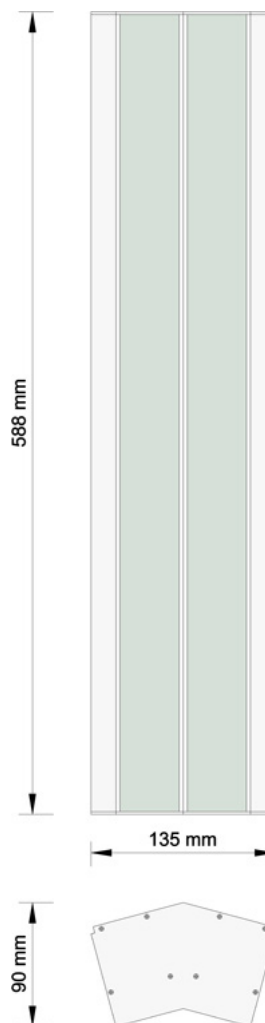

Manufactured in Greece





Type	DUPLO-T
Luminous Flux	1950 lm - 19044 lm
Power	12W - 108W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	163 - 176 lm/W
Power Factor	0,95
CRI	80
CCT	2700K - 6500K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	Powder coating - RAL selection
Dimensions	135mm x 90mm x (300 - 2550)mm
Weight	1,8 - 9,2 Kg
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN 60598-2-2:2023 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-T Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
12W - 30cm	DUPLO-T-30-827-12	2700	80	1950	163	
	DUPLO-T-30-830-12	3000	80	1996	166	
	DUPLO-T-30-835-12	3500	80	2064	172	
	DUPLO-T-30-840-12	4000	80	2116	176	
	DUPLO-T-30-850-12	5000	80	2102	175	
DUPLO-T-30-865-12	6500	80	2074	173		
18W - 45cm	DUPLO-T-45-827-18	2700	80	2925	163	
	DUPLO-T-45-830-18	3000	80	2994	166	
	DUPLO-T-45-835-18	3500	80	3096	172	
	DUPLO-T-45-840-18	4000	80	3174	176	
	DUPLO-T-45-850-18	5000	80	3153	175	
DUPLO-T-45-865-18	6500	80	3111	173		
24W - 60cm	DUPLO-T-60-827-24	2700	80	3900	163	
	DUPLO-T-60-830-24	3000	80	3992	166	
	DUPLO-T-60-835-24	3500	80	4128	172	
	DUPLO-T-60-840-24	4000	80	4232	176	
	DUPLO-T-60-850-24	5000	80	4204	175	
DUPLO-T-60-865-24	6500	80	4148	173		
30W - 72cm	DUPLO-T-72-827-30	2700	80	4875	163	
	DUPLO-T-72-830-30	3000	80	4990	166	
	DUPLO-T-72-835-30	3500	80	5160	172	
	DUPLO-T-72-840-30	4000	80	5290	176	
	DUPLO-T-72-850-30	5000	80	5255	175	
DUPLO-T-72-865-30	6500	80	5185	173		
36W - 85cm	DUPLO-T-85-827-36	2700	80	5850	163	
	DUPLO-T-85-830-36	3000	80	5988	166	
	DUPLO-T-85-835-36	3500	80	6192	172	
	DUPLO-T-85-840-36	4000	80	6348	176	
	DUPLO-T-85-850-36	5000	80	6306	175	
DUPLO-T-85-865-36	6500	80	6222	173		
42W - 100cm	DUPLO-T-100-827-42	2700	80	6825	163	
	DUPLO-T-100-830-42	3000	80	6986	166	
	DUPLO-T-100-835-42	3500	80	7224	172	
	DUPLO-T-100-840-42	4000	80	7406	176	
	DUPLO-T-100-850-42	5000	80	7357	175	
DUPLO-T-100-865-42	6500	80	7259	173		
48W - 115cm	DUPLO-T-115-827-48	2700	80	7800	163	
	DUPLO-T-115-830-48	3000	80	7984	166	
	DUPLO-T-115-835-48	3500	80	8256	172	
	DUPLO-T-115-840-48	4000	80	8464	176	
	DUPLO-T-115-850-48	5000	80	8408	175	
DUPLO-T-115-865-48	6500	80	8296	173		
54W - 128cm	DUPLO-T-128-827-54	2700	80	8775	163	
	DUPLO-T-128-830-54	3000	80	8982	166	
	DUPLO-T-128-835-54	3500	80	9288	172	
	DUPLO-T-128-840-54	4000	80	9522	176	
	DUPLO-T-128-850-54	5000	80	9459	175	
DUPLO-T-128-865-54	6500	80	9333	173		
60W - 142cm	DUPLO-T-142-827-60	2700	80	9750	163	
	DUPLO-T-142-830-60	3000	80	9980	166	
	DUPLO-T-142-835-60	3500	80	10320	172	
	DUPLO-T-142-840-60	4000	80	10580	176	
	DUPLO-T-142-850-60	5000	80	10510	175	
DUPLO-T-142-865-60	6500	80	10370	173		

DUPLO-T Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
66W - 156cm	DUPLO-T-155-827-66	2700	80	10725	163	
	DUPLO-T-155-830-66	3000	80	10978	166	
	DUPLO-T-155-835-66	3500	80	11352	172	
	DUPLO-T-155-840-66	4000	80	11638	176	
	DUPLO-T-155-850-66	5000	80	11561	175	
DUPLO-T-155-865-66	6500	80	11407	173		
72W - 170cm	DUPLO-T-170-827-72	2700	80	11700	163	
	DUPLO-T-170-830-72	3000	80	11976	166	
	DUPLO-T-170-835-72	3500	80	12384	172	
	DUPLO-T-170-840-72	4000	80	12696	176	
	DUPLO-T-170-850-72	5000	80	12612	175	
DUPLO-T-170-865-72	6500	80	12444	173		
78W - 185cm	DUPLO-T-185-827-78	2700	80	12675	163	
	DUPLO-T-185-830-78	3000	80	12974	166	
	DUPLO-T-185-835-78	3500	80	13416	172	
	DUPLO-T-185-840-78	4000	80	13754	176	
	DUPLO-T-185-850-78	5000	80	13663	175	
DUPLO-T-185-865-78	6500	80	13481	173		
84W - 200cm	DUPLO-T-200-827-84	2700	80	13650	163	
	DUPLO-T-200-830-84	3000	80	13972	166	
	DUPLO-T-200-835-84	3500	80	14448	172	
	DUPLO-T-200-840-84	4000	80	14812	176	
	DUPLO-T-200-850-84	5000	80	14714	175	
DUPLO-T-200-865-84	6500	80	14518	173		
90W - 212cm	DUPLO-T-212-827-90	2700	80	14625	163	
	DUPLO-T-212-830-90	3000	80	14970	166	
	DUPLO-T-212-835-90	3500	80	15480	172	
	DUPLO-T-212-840-90	4000	80	15870	176	
	DUPLO-T-212-850-90	5000	80	15765	175	
DUPLO-T-212-865-90	6500	80	15555	173		
96W - 225cm	DUPLO-T-225-827-96	2700	80	15600	163	
	DUPLO-T-225-830-96	3000	80	15968	166	
	DUPLO-T-225-835-96	3500	80	16512	172	
	DUPLO-T-225-840-96	4000	80	16928	176	
	DUPLO-T-225-850-96	5000	80	16816	175	
DUPLO-T-225-865-96	6500	80	16592	173		
102W - 240cm	DUPLO-T-240-827-102	2700	80	16575	163	
	DUPLO-T-240-830-102	3000	80	16966	166	
	DUPLO-T-240-835-102	3500	80	17544	172	
	DUPLO-T-240-840-102	4000	80	17986	176	
	DUPLO-T-240-850-102	5000	80	17867	175	
DUPLO-T-240-865-102	6500	80	17629	173		
108W - 255cm	DUPLO-T-255-827-108	2700	80	17550	163	
	DUPLO-T-255-830-108	3000	80	17964	166	
	DUPLO-T-255-835-108	3500	80	18576	172	
	DUPLO-T-255-840-108	4000	80	19044	176	
	DUPLO-T-255-850-108	5000	80	18918	175	
DUPLO-T-255-865-108	6500	80	18666	173		

Type	DUPLO-TX
Luminous Flux	3854 lm - 37638 lm
Power	26W - 228W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	148 - 161 lm/W
Power Factor	0,95
CRI	80
CCT	2700K - 6500K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	135mm x 90mm x (300 - 2550)mm
Dimensions	1.8 - 9.2 Kg
Weight	Powder coating - RAL color selection
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-TX Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
26W - 30cm	DUPLO-TX-30-827-26	2700	80	3854	148	
	DUPLO-TX-30-830-26	3000	80	3942	152	
	DUPLO-TX-30-835-26	3500	80	4078	157	
	DUPLO-TX-30-840-26	4000	80	4182	161	
	DUPLO-TX-30-850-26	5000	80	4156	160	
38W - 45cm	DUPLO-TX-45-865-26	6500	80	4098	158	
	DUPLO-TX-45-827-38	2700	80	5780	148	
	DUPLO-TX-45-830-38	3000	80	5913	152	
	DUPLO-TX-45-835-38	3500	80	6117	157	
	DUPLO-TX-45-840-38	4000	80	6273	161	
50W - 60cm	DUPLO-TX-60-850-38	5000	80	6234	160	
	DUPLO-TX-45-865-38	6500	80	6147	158	
	DUPLO-TX-60-827-50	2700	80	7708	148	
	DUPLO-TX-60-830-50	3000	80	7884	152	
	DUPLO-TX-60-835-50	3500	80	8156	157	
62W - 72cm	DUPLO-TX-60-840-50	4000	80	8364	161	
	DUPLO-TX-60-850-50	5000	80	8312	160	
	DUPLO-TX-60-865-50	6500	80	8196	158	
	DUPLO-TX-72-827-62	2700	80	9635	148	
	DUPLO-TX-72-830-62	3000	80	9855	152	
74W - 85cm	DUPLO-TX-72-835-62	3500	80	10195	157	
	DUPLO-TX-72-840-62	4000	80	10455	161	
	DUPLO-TX-72-850-62	5000	80	10390	160	
	DUPLO-TX-72-865-62	6500	80	10245	158	
	DUPLO-TX-85-827-74	2700	80	11562	148	
88W - 100cm	DUPLO-TX-85-830-74	3000	80	11826	152	
	DUPLO-TX-85-835-74	3500	80	12234	157	
	DUPLO-TX-85-840-74	4000	80	12546	161	
	DUPLO-TX-85-850-74	5000	80	12468	160	
	DUPLO-TX-85-865-74	6500	80	12294	158	
100W - 115cm	DUPLO-TX-100-827-88	2700	80	13489	148	
	DUPLO-TX-100-830-88	3000	80	13797	152	
	DUPLO-TX-100-835-88	3500	80	14273	157	
	DUPLO-TX-100-840-88	4000	80	14637	161	
	DUPLO-TX-100-850-88	5000	80	14546	160	
112W - 128cm	DUPLO-TX-100-865-88	6500	80	14343	158	
	DUPLO-TX-115-827-100	2700	80	15416	148	
	DUPLO-TX-115-830-100	3000	80	15768	152	
	DUPLO-TX-115-835-100	3500	80	16312	157	
	DUPLO-TX-115-840-100	4000	80	16728	161	
126W - 142cm	DUPLO-TX-115-850-100	5000	80	16624	160	
	DUPLO-TX-115-865-100	6500	80	16392	158	
	DUPLO-TX-128-827-112	2700	80	17343	148	
	DUPLO-TX-128-830-112	3000	80	17739	152	
	DUPLO-TX-128-835-112	3500	80	18351	157	
126W - 142cm	DUPLO-TX-128-840-112	4000	80	18819	161	
	DUPLO-TX-128-850-112	5000	80	18702	160	
	DUPLO-TX-128-865-112	6500	80	18441	158	
	DUPLO-TX-142-827-126	2700	80	19270	148	
	DUPLO-TX-142-830-126	3000	80	19710	152	
126W - 142cm	DUPLO-TX-142-835-126	3500	80	20390	157	
	DUPLO-TX-142-840-126	4000	80	20910	161	
	DUPLO-TX-142-850-126	5000	80	20780	160	
	DUPLO-TX-142-865-126	6500	80	20490	158	

DUPLO-TX Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
138W - 156cm	DUPLO-TX-155-827-138	2700	80	21197	148	
	DUPLO-TX-155-830-138	3000	80	21681	152	
	DUPLO-TX-155-835-138	3500	80	22429	157	
	DUPLO-TX-155-840-138	4000	80	23001	161	
	DUPLO-TX-155-850-138	5000	80	22858	160	
150W - 170cm	DUPLO-TX-155-865-138	6500	80	22539	158	
	DUPLO-TX-170-827-150	2700	80	23124	148	
	DUPLO-TX-170-830-150	3000	80	23652	152	
	DUPLO-TX-170-835-150	3500	80	24468	157	
	DUPLO-TX-170-840-150	4000	80	25092	161	
164W - 185cm	DUPLO-TX-170-850-150	5000	80	24936	160	
	DUPLO-TX-170-865-150	6500	80	24588	158	
	DUPLO-TX-185-827-164	2700	80	25051	148	
	DUPLO-TX-185-830-164	3000	80	25623	152	
	DUPLO-TX-185-835-164	3500	80	26507	157	
176W - 200cm	DUPLO-TX-185-840-164	4000	80	27183	161	
	DUPLO-TX-185-850-164	5000	80	27014	160	
	DUPLO-TX-185-865-164	6500	80	26637	158	
	DUPLO-TX-200-827-176	2700	80	26978	148	
	DUPLO-TX-200-830-176	3000	80	27594	152	
190W - 212cm	DUPLO-TX-200-835-176	3500	80	28546	157	
	DUPLO-TX-200-840-176	4000	80	29274	161	
	DUPLO-TX-200-850-176	5000	80	29092	160	
	DUPLO-TX-200-865-176	6500	80	28686	158	
	DUPLO-TX-212-827-190	2700	80	28905	148	
202W - 225cm	DUPLO-TX-212-830-190	3000	80	29565	152	
	DUPLO-TX-212-835-190	3500	80	30585	157	
	DUPLO-TX-212-840-190	4000	80	31365	161	
	DUPLO-TX-212-850-190	5000	80	31170	160	
	DUPLO-TX-212-865-190	6500	80	30735	158	
216W - 240cm	DUPLO-TX-225-827-202	2700	80	30832	148	
	DUPLO-TX-225-830-202	3000	80	31536	152	
	DUPLO-TX-225-835-202	3500	80	32624	157	
	DUPLO-TX-225-840-202	4000	80	33456	161	
	DUPLO-TX-225-850-202	5000	80	33248	160	
228W - 255cm	DUPLO-TX-225-865-202	6500	80	32784	158	
	DUPLO-TX-240-827-216	2700	80	32759	148	
	DUPLO-TX-240-830-216	3000	80	33507	152	
	DUPLO-TX-240-835-216	3500	80	34663	157	
	DUPLO-TX-240-840-216	4000	80	35547	161	
228W - 255cm	DUPLO-TX-240-850-216	5000	80	35326	160	
	DUPLO-TX-240-865-216	6500	80	34833	158	
	DUPLO-TX-255-827-228	2700	80	34686	148	
	DUPLO-TX-255-830-228	3000	80	35478	152	
	DUPLO-TX-255-835-228	3500	80	36702	157	
228W - 255cm	DUPLO-TX-255-840-228	4000	80	37638	161	
	DUPLO-TX-255-850-228	5000	80	37404	160	
	DUPLO-TX-255-865-228	6500	80	36882	158	

Type	DUPLO-SP
Luminous Flux	4144 lm - 39564 lm
Power	28W - 230W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	159 - 169 lm/W
Power Factor	0,95
CRI	80
CCT	3000K - 6500K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	135mm x 90mm x (300 - 2550)mm
Dimensions	1,8 - 9,2 Kg
Weight	Powder coating - RAL color selection
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-SP Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
28W - 30cm	DUPLO-SP-30-830-28	3000	80	4144	159	
	DUPLO-SP-30-840-28	4000	80	4396	169	
	DUPLO-SP-30-850-28	5000	80	4368	168	
	DUPLO-SP-30-865-28	6500	80	4310	166	
52W - 60cm	DUPLO-SP-60-830-52	3000	80	8288	159	
	DUPLO-SP-60-840-52	4000	80	8792	169	
	DUPLO-SP-60-850-52	5000	80	8736	168	
	DUPLO-SP-60-865-52	6500	80	8620	166	
78W - 85cm	DUPLO-SP-85-830-78	3000	80	12432	159	
	DUPLO-SP-85-840-78	4000	80	13188	169	
	DUPLO-SP-85-850-78	5000	80	13104	168	
	DUPLO-SP-85-865-78	6500	80	12930	166	
102W - 115cm	DUPLO-SP-115-830-102	3000	80	16576	163	
	DUPLO-SP-115-840-102	4000	80	17584	172	
	DUPLO-SP-115-850-102	5000	80	17472	171	
	DUPLO-SP-115-865-102	6500	80	17240	169	
128W - 142cm	DUPLO-SP-142-830-128	3000	80	20720	162	
	DUPLO-SP-142-840-128	4000	80	21980	172	
	DUPLO-SP-142-850-128	5000	80	21840	171	
	DUPLO-SP-142-865-128	6500	80	21550	168	

DUPLO-SP Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
154W - 170cm	DUPLO-SP-170-830-154	3000	80	24864	161	
	DUPLO-SP-170-840-154	4000	80	26376	171	
	DUPLO-SP-170-850-154	5000	80	26208	170	
	DUPLO-SP-170-865-154	6500	80	25860	168	
178W - 200cm	DUPLO-SP-200-830-178	3000	80	29008	163	
	DUPLO-SP-200-840-178	4000	80	30772	173	
	DUPLO-SP-200-850-178	5000	80	30576	172	
	DUPLO-SP-200-865-178	6500	80	30170	169	
204W - 225cm	DUPLO-SP-225-830-204	3000	80	33152	163	
	DUPLO-SP-225-840-204	4000	80	35168	172	
	DUPLO-SP-225-850-204	5000	80	34944	171	
	DUPLO-SP-225-865-204	6500	80	34480	169	
230W - 255cm	DUPLO-SP-255-830-230	3000	80	37296	162	
	DUPLO-SP-255-840-230	4000	80	39564	172	
	DUPLO-SP-255-850-230	5000	80	39312	171	
	DUPLO-SP-255-865-230	6500	80	38790	169	

Type	DUPLO-SPX
Luminous Flux	5754 lm - 54936 lm
Power	36W - 334W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	155 - 164 lm/W
Power Factor	0,95
CRI	80
CCT	2700K - 6500K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	135mm x 90mm x (300 - 2550)mm
Dimensions	1,8 - 9,2 Kg
Weight	Powder coating - RAL color selection
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-SPX Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
36W - 30cm	DUPLO-SPX-30-830-36	3000	80	5754	160	
	DUPLO-SPX-30-840-36	4000	80	6104	170	
	DUPLO-SPX-30-850-36	5000	80	6064	168	
	DUPLO-SPX-30-865-36	6500	80	5984	166	
74W - 60cm	DUPLO-SPX-60-830-74	3000	80	11508	156	
	DUPLO-SPX-60-840-74	4000	80	12208	165	
	DUPLO-SPX-60-850-74	5000	80	12128	164	
	DUPLO-SPX-60-865-74	6500	80	11968	162	
112W - 85cm	DUPLO-SPX-85-830-112	3000	80	17262	154	
	DUPLO-SPX-85-840-112	4000	80	18312	164	
	DUPLO-SPX-85-850-112	5000	80	18192	162	
	DUPLO-SPX-85-865-112	6500	80	17952	160	
150W - 115cm	DUPLO-SPX-115-830-150	3000	80	23016	153	
	DUPLO-SPX-115-840-150	4000	80	24416	163	
	DUPLO-SPX-115-850-150	5000	80	24256	162	
	DUPLO-SPX-115-865-150	6500	80	23936	160	
186W - 142cm	DUPLO-SPX-142-830-186	3000	80	28770	155	
	DUPLO-SPX-142-840-186	4000	80	30520	164	
	DUPLO-SPX-142-850-186	5000	80	30320	163	
	DUPLO-SPX-142-865-186	6500	80	29920	161	

DUPLO-SPX Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
222W - 170cm	DUPLO-SPX-170-830-222	3000	80	34524	156	
	DUPLO-SPX-170-840-222	4000	80	36624	165	
	DUPLO-SPX-170-850-222	5000	80	36384	164	
	DUPLO-SPX-170-865-222	6500	80	35904	162	
260W - 200cm	DUPLO-SPX-200-830-260	3000	80	40278	155	
	DUPLO-SPX-200-840-260	4000	80	42728	164	
	DUPLO-SPX-200-850-260	5000	80	42448	163	
	DUPLO-SPX-200-865-260	6500	80	41888	161	
296W - 225cm	DUPLO-SPX-225-830-296	3000	80	46032	156	
	DUPLO-SPX-225-840-296	4000	80	48832	165	
	DUPLO-SPX-225-850-296	5000	80	48512	164	
	DUPLO-SPX-225-865-296	6500	80	47872	162	
334W - 255cm	DUPLO-SPX-255-830-334	3000	80	51786	155	
	DUPLO-SPX-255-840-334	4000	80	54936	164	
	DUPLO-SPX-255-850-334	5000	80	54576	163	
	DUPLO-SPX-255-865-334	6500	80	53856	161	

Type	DUPLO-XT
Luminous Flux	2356 lm - 22716 lm
Power	17W - 150W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	148 - 161 lm/W
Power Factor	0,95
CRI	90
CCT	2700K - 4000K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	135mm x 90mm x (300 - 2550)mm
Dimensions	1.8 - 9.2 Kg
Weight	Powder coating - RAL color selection
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-XT Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
17W - 30cm	DUPLO-XT-30-927-17	2700	90	2356	139	
	DUPLO-XT-30-930-17	3000	90	2432	143	
	DUPLO-XT-30-935-17	3500	90	2496	147	
26W - 45cm	DUPLO-XT-30-940-17	4000	90	2524	148	
	DUPLO-XT-45-927-26	2700	90	3534	136	
	DUPLO-XT-45-930-26	3000	90	3648	140	
	DUPLO-XT-45-935-26	3500	90	3744	144	
34W - 60cm	DUPLO-XT-45-940-26	4000	90	3786	146	
	DUPLO-XT-60-927-34	2700	90	4712	139	
	DUPLO-XT-60-930-34	3000	90	4864	143	
42W - 72cm	DUPLO-XT-60-935-34	3500	90	4992	147	
	DUPLO-XT-60-940-34	4000	90	5048	148	
	DUPLO-XT-72-927-42	2700	90	5890	140	
52W - 85cm	DUPLO-XT-72-930-42	3000	90	6080	145	
	DUPLO-XT-72-935-42	3500	90	6240	149	
	DUPLO-XT-72-940-42	4000	90	6310	150	
	DUPLO-XT-85-927-52	2700	90	7068	136	
60W - 100cm	DUPLO-XT-85-930-52	3000	90	7296	140	
	DUPLO-XT-85-935-52	3500	90	7488	144	
	DUPLO-XT-85-940-52	4000	90	7572	146	
	DUPLO-XT-100-927-60	2700	90	8246	137	
68W - 115cm	DUPLO-XT-100-930-60	3000	90	8512	142	
	DUPLO-XT-100-935-60	3500	90	8736	146	
	DUPLO-XT-100-940-60	4000	90	8834	147	
	DUPLO-XT-115-927-68	2700	90	9424	139	
78W - 126cm	DUPLO-XT-115-930-68	3000	90	9728	143	
	DUPLO-XT-115-935-68	3500	90	9984	147	
	DUPLO-XT-115-940-68	4000	90	10096	148	
	DUPLO-XT-126-927-78	2700	90	10602	136	
86W - 142cm	DUPLO-XT-126-930-78	3000	90	10944	140	
	DUPLO-XT-126-935-78	3500	90	11232	144	
	DUPLO-XT-126-940-78	4000	90	11358	146	
	DUPLO-XT-142-927-86	2700	90	11780	137	
	DUPLO-XT-142-930-86	3000	90	12160	141	
	DUPLO-XT-142-935-86	3500	90	12480	145	
	DUPLO-XT-142-940-86	4000	90	12620	147	


DUPLO-XT Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
94W - 156cm	DUPLO-XT-156-927-94	2700	90	12958	138	
	DUPLO-XT-156-930-94	3000	90	13376	142	
	DUPLO-XT-156-935-94	3500	90	13728	146	
	DUPLO-XT-156-940-94	4000	90	13882	148	
102W - 170cm	DUPLO-XT-170-927-102	2700	90	14136	139	
	DUPLO-XT-170-930-102	3000	90	14592	143	
	DUPLO-XT-170-935-102	3500	90	14976	147	
	DUPLO-XT-170-940-102	4000	90	15144	148	
112W - 185cm	DUPLO-XT-185-927-112	2700	90	15314	137	
	DUPLO-XT-185-930-112	3000	90	15808	141	
	DUPLO-XT-185-935-112	3500	90	16224	145	
120W - 200cm	DUPLO-XT-185-940-112	4000	90	16406	146	
	DUPLO-XT-200-927-120	2700	90	16492	137	
	DUPLO-XT-200-930-120	3000	90	17024	142	
128W - 212cm	DUPLO-XT-200-935-120	3500	90	17472	146	
	DUPLO-XT-200-940-120	4000	90	17668	147	
	DUPLO-XT-212-927-128	2700	90	17670	138	
	DUPLO-XT-212-930-128	3000	90	18240	143	
136W - 225cm	DUPLO-XT-212-935-128	3500	90	18720	146	
	DUPLO-XT-212-940-128	4000	90	18930	148	
	DUPLO-XT-225-927-136	2700	90	18848	139	
	DUPLO-XT-225-930-136	3000	90	19456	143	
142W - 240cm	DUPLO-XT-225-935-136	3500	90	19968	147	
	DUPLO-XT-225-940-136	4000	90	20192	148	
	DUPLO-XT-240-927-142	2700	90	20026	141	
	DUPLO-XT-240-930-142	3000	90	20672	146	
150W - 255cm	DUPLO-XT-240-935-142	3500	90	21216	149	
	DUPLO-XT-240-940-142	4000	90	21454	151	
	DUPLO-XT-255-927-150	2700	90	21204	141	
	DUPLO-XT-255-930-150	3000	90	21888	146	
	DUPLO-XT-255-935-150	3500	90	22464	150	
	DUPLO-XT-255-940-150	4000	90	22716	151	

Type	DUPLO-XTS
Luminous Flux	4924 lm - 46062 lm
Power	36W - 334W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	131 - 138 lm/W
Power Factor	0,95
CRI	90
CCT	3000K - 4000K
IP Rating	IP43
IK Rating	IK08
Body	Aluminium
Finishing	135mm x 90mm x (300 - 2550)mm
Dimensions	1.8 - 9.2 Kg
Weight	Powder coating - RAL color selection
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

DUPLO-XTS Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
36W - 30cm	DUPLO-XTS-30-930-36	3000	90	4924	137	
	DUPLO-XTS-30-940-36	4000	90	5118	142	
74W - 60cm	DUPLO-XTS-60-930-74	3000	90	9848	133	
	DUPLO-XTS-60-940-74	4000	90	10236	138	
112W - 85cm	DUPLO-XTS-85-930-112	3000	90	14772	132	
	DUPLO-XTS-85-940-112	4000	90	15354	137	
150W - 115cm	DUPLO-XTS-115-930-150	3000	90	19696	131	
	DUPLO-XTS-115-940-150	4000	90	20472	136	
186W - 142cm	DUPLO-XTS-142-930-186	3000	90	24620	132	
	DUPLO-XTS-142-940-186	4000	90	25590	138	
222W - 170cm	DUPLO-XTS-170-930-222	3000	90	29544	133	
	DUPLO-XTS-170-940-222	4000	90	30708	138	
260W - 200cm	DUPLO-XTS-200-930-260	3000	90	34468	133	
	DUPLO-XTS-200-940-260	4000	90	35826	138	
296W - 225cm	DUPLO-XTS-225-930-296	3000	90	39392	133	
	DUPLO-XTS-225-940-296	4000	90	40944	138	
334W - 255cm	DUPLO-XTS-255-930-334	3000	90	44316	133	
	DUPLO-XTS-255-940-334	4000	90	46062	138	






Polar Intensity Diagram



AFOI TSIOLAKI & SIA OE G.P.
 Industrial Zone of Thessaloniki
 Greece
 T: +302310 798 335
 F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

 facebook.com/Techlumen
 [@Techlumen](https://twitter.com/Techlumen)
 linkedin.com/company/tsiolakis-construction