




LED RECESSED LIGHT

DL-11 Series

The DL-11 recessed luminaires offer a reliable and cost efficient light solution. They are available in 3000K and 4000K and with outputs from 1040lm to 1100lm. They have a light beam of 90 ° or 60 ° with UGR <19.

DL-11 are produced with a 5 year warranty and a L70B50> 50000h.

Dimensions

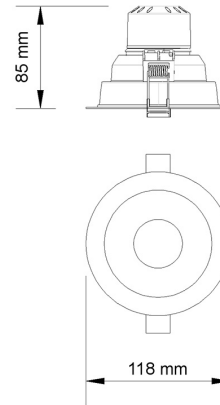


Type	DL-11 Series
Luminus Power	1040 lm - 1100 lm
Power	10W
Driver	Tridonic
LED Chip	Tridonic
Consumption	0.010 KWh/h
Ambient Temperature	-30 °C - + 40 °C
Efficacy	104 - 110 lm/W
Power Factor	0,95
CRI	80
CCT	3000K - 4000K
Beam angle	60° - 90°
IP Rating	IP20
Body	Aluminium
Finishing	White or any RAL under option
Dimensions	Φ118
Cut-out	97mm - 110mm
Weight	0.25 Kg
Warranty	5 years
Approvals:	CE, EN 60598-1 EN 13032.01 EN 61439-1:2009 EN 61543:1995 2006/95/EC 2004/108/EC EN 60598-2-2 Rohs


DL-11 series Versions					
Watt	Code	CCT	CRI	Lumen	Lm/W
10 W	DL-11-830-10	3000	80	1040	104
	DL-11-840-10	4000	80	1100	110

Polar Intensity Diagram

60°

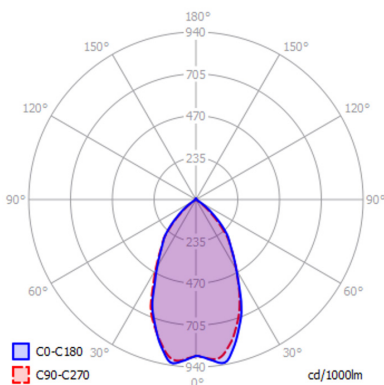

90°

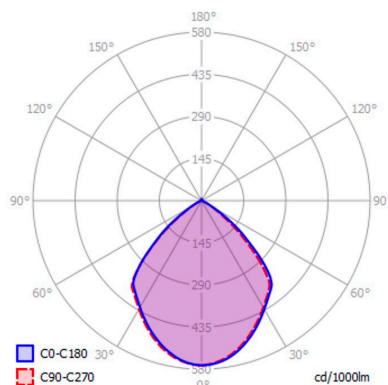

AFOI TSIOLAKI OE

Industrial Zone of Thessaloniki
Greece
T: +302310 798 335
F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

 facebook.com/Techlumen

 [@Techlumen](https://twitter.com/Techlumen)

 linkedin.com/company/tsiolakis-construction