



Linear LED

L-SP Series

L-SP linear LED luminaires provide powerful lighting with minimal consumption.

They are available in versions of 3000K, 4000K or 5000K and in various lengths, up to 282cm and 21300lm.

They have 5 years warranty

L-SP LED fixtures are also produced with additional emergency function, with 1h or 3h or emergency operation during power failures.



Manufactured in Greece



Dimensions




Applications

- Warehouses
- Supermarkets
- Offices
- Factories

Type	L-SP
Luminus Power	2111 lm - 21300 lm
Power	12.0W - 119.5W
Driver	Tridonic
LED Chip	Tridonic
Consumption	0.012 - 0.125 kWh/h
Ambient Temperature	-30 °C - + 40 °C
Efficacy	176 - 178 lm/W
Power Factor	0,95
CRI	80
CCT	3000K - 5000K
IP Rating	IP30
Body	Alluminium
Finishing	51mm x 75mm x (300 - 2820)mm
Dimensions	0.6 - 3.5 Kg
Weight	Powder coating - RAL selection
Warranty	5 years
Approvals:	CE, EN 60598-1, EN 13032.01 EN 61439-1:2009 EN 61543:1995 2006/95/EC 2004/108/EC EN 60598-2-1 RohS REACH

L-SP Versions					
Watt	Code	CCT	CRI	Lumen	Lm/W
12.0W - 30cm	L30-SP-830-12	3000	80	2111	176
	L30-SP-840-12	4000	80	2130	176
	L30-SP-850-12	5000	80	2138	178
23.9W - 60cm	L60-SP-830-24	3000	80	4205	176
	L60-SP-840-24	4000	80	4210	176
	L60-SP-850-24	5000	80	4260	178
35.9W - 85cm	L85-SP-830-36	3000	80	6316	176
	L85-SP-840-36	4000	80	6340	176
47.8W - 115cm	L115-SP-830-48	3000	80	8410	176
	L115-SP-840-48	4000	80	8420	176
	L115-SP-850-48	5000	80	8520	178
59.8W - 142cm	L142-SP-830-60	3000	80	10521	176
	L142-SP-840-60	4000	80	10550	176
	L142-SP-850-60	5000	80	10658	178
71.7W - 170cm	L170-SP-830-72	3000	80	12615	176
	L170-SP-840-72	4000	80	12630	176
	L170-SP-850-72	5000	80	12780	178
83.7W - 200cm	L200-SP-830-84	3000	80	14726	176
	L200-SP-840-84	4000	80	17460	176
	L200-SP-850-84	5000	80	14918	178
95.6W - 225cm	L225-SP-830-96	3000	80	16820	176
	L225-SP-840-96	4000	80	16840	176
	L225-SP-850-96	5000	80	17040	178
107.6W - 255cm	L255-SP-830-108	3000	80	18931	176
	L255-SP-840-108	4000	80	18970	176
	L255-SP-850-108	5000	80	19178	178
119.5W - 282cm	L282-SP-830-120	3000	80	21025	176
	L282-SP-840-120	4000	80	21050	176
	L282-SP-850-120	5000	80	21300	178

Polar Intensity Diagram

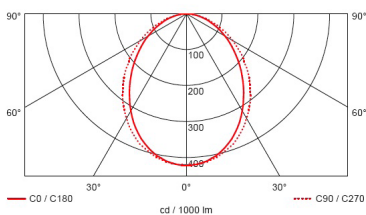

AFOI TSIOLAKI OE

Industrial Zone of Thessaloniki
Greece
T: +302310 798 335
F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

 facebook.com/techlumenledlightingen

 @Techlumen

 linkedin.com/company/tsiolakis-construction