



Linear LED

L-T Series

L-T linear LED luminaires provide powerful lighting with minimal consumption.

They are available in versions of 3000K, 4000K or 5000K and in various lengths, up to 255cm and 15210lm.

In operation they produce minimal heat.

L-T luminaires have 5 year warranty and L80 rating >70000h.

L-T LED fixtures are also produced with additional emergency function, with 1h or 3h or emergency operation during power failures.



Manufactured in Greece



Dimensions




Applications

- Warehouses
- Supermarkets
- Offices
- Factories

Type	L-T
Luminus Power	979 lm - 10450 lm
Power	5.7W - 56.5W
Driver	Tridonic
LED Chip	Tridonic
Consumption	0.006 - 0.057 KWh/h
Ambient Temperature	-30 °C - + 40 °C
Efficacy	173 - 185 lm/W
Power Factor	0,95
CRI	80
CCT	3000K - 5000K
IP Rating	IP30
Body	Alluminium
Finishing	Powder coating - RAL selection
Dimensions	(300 - 2820) mm X 110 mm X 82 mm
Weight	1.4 Kg - 2.7 Kg
Warranty	5 years
Approvals:	CE, EN 60598-1 EN 13032.01 EN 61439-1:2009 EN 61543:1995 2006/95/EC 2004/108/EC EN 60598-2-1 Rohs

Εκδόσεις L-T					
Watt	Code	CCT	CRI	Lumen	Lm/W
5.7W - 30cm	L30-T-830-6	3000	80	979	173
	L30-T-840-6	4000	80	1025	181
	L30-T-850-6	5000	80	1045	185
11.3W - 60cm	L60-T-830-12	3000	80	1958	173
	L60-T-840-12	4000	80	2050	181
	L60-T-850-12	5000	80	2090	185
17.0W - 85cm	L85-T-830-17	3000	80	2937	173
	L85-T-840-17	4000	80	3075	181
	L85-T-850-17	5000	80	3135	185
22.6W - 115cm	L115-T-830-23	3000	80	3916	173
	L115-T-840-23	4000	80	4100	181
	L115-T-850-23	5000	80	4180	185
28.3W - 142cm	L142-T-830-28	3000	80	4895	173
	L142-T-840-28	4000	80	5125	181
	L142-T-850-28	5000	80	5225	185
34.0W - 170cm	L170-T-830-34	3000	80	5874	173
	L170-T-840-34	4000	80	6150	181
	L170-T-850-34	5000	80	6270	185
39.6W - 200cm	L200-T-830-40	3000	80	6853	173
	L200-T-840-40	4000	80	7175	181
	L200-T-850-40	5000	80	7315	185
45.2W - 225cm	L225-T-830-45	3000	80	7832	173
	L225-T-840-45	4000	80	8200	181
	L225-T-850-45	5000	80	8360	185
51.0W - 255cm	L255-T-830-51	3000	80	8811	173
	L255-T-840-51	4000	80	9225	181
	L255-T-850-51	5000	80	9405	185
56.5W - 282cm	L282-T-830-57	3000	80	9790	173
	L282-T-840-57	4000	80	10250	181
	L282-T-850-57	5000	80	10450	185

Polar Intensity Diagram

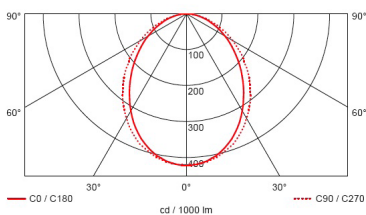

AFOI TSIOLAKI OE

Industrial Zone of Thessaloniki
Greece
T: +302310 798 335
F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

 facebook.com/techlumenledlightingen

 @Techlumen

 linkedin.com/company/tsiolakis-construction