

Linear LED

LumiPod Series

LumiPod offers an ideal blend of aesthetics and functionality. Crafted with precision using high-quality materials, LumiPod is designed to enhance any environment with its elegant capsule shape.

Sleek and Durable Design:

LumiPod is meticulously crafted using lightweight yet robust aluminium and PMMA materials. It's smooth contours and minimalist design create a modern and sophisticated look, adding a touch of elegance to any setting. The electrostatic powder coating allows for various stunning colours, enabling you to personalise your space with style.

Flexible CCT Options:

LumiPod is available in three colour temperature options to meet your specific lighting needs: 3000K, 4000K, and 5000K. Whether you desire a warm and cosy atmosphere or a bright and crisp ambience, LumiPod's CCT options allow you to create the perfect lighting environment for any occasion.



Multiple Length Variations:

LumiPod comes in a range of lengths to accommodate different spaces. From the compact 65cm version to the expansive 175cm option, you can effortlessly find the ideal size for your specific requirements. This versatility ensures that LumiPod can seamlessly fit into various settings- a cosy corner or a grand hall.

Enhanced Control Options:

LumiPod offers optional compatibility with DALI or Bluetooth systems for added convenience and control. This feature enables seamless integration into existing lighting setups. It allows for effortless adjustment of brightness levels, scheduling, or colour temperature settings, providing ultimate flexibility and ease of use.

Dimensions



DALI

0-10V

Em 3h

CASAMBI

TUNABLE
WHITE

Applications

- Warehouses
- Supermarkets
- Offices
- Factories

Manufactured in Greece




Type	LumiPod
Luminous Flux	1683 lm - 20480 lm
Power	24W - 144W
Ambient Temperature	-30 °C - + 50°C
Efficacy	140 - 142 lm/W
Power Factor	0,95
CRI	80
CCT	3000K - 5000K
IP Rating	IP66
IK Rating	IK05
Body	Aluminium - PC
Dimensions	Φ82 - (650 - 1750)mm
Weight	1.2 - 4 Kg
Warranty	5 years
Compliances:	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

LumiPod- 1way Versions							
Length	Code	Watt	CCT	CRI	Lumen	Lm/W	
65cm	LumiPod-65-T-830-12	12	3000	80	1683	140	
	LumiPod-65-T-840-12	12	4000	80	1684	140	
	LumiPod-65-T-850-12	12	5000	80	1704	142	
	LumiPod-65-SP-830-24	24	3000	80	3365	140	
	LumiPod-65-SP-840-24	24	4000	80	3368	140	
90cm	LumiPod-65-SP-850-24	24	5000	80	3408	142	
	LumiPod-90-T-830-18	18	3000	80	2526	140	
	LumiPod-90-T-840-18	18	4000	80	2536	140	
	LumiPod-90-T-850-18	18	5000	80	2558	142	
	LumiPod-90-SP-830-36	36	3000	80	5052	140	
120cm	LumiPod-90-SP-840-36	36	4000	80	5072	140	
	LumiPod-90-SP-850-36	36	5000	80	5115	142	
	LumiPod-120-T-830-24	24	3000	80	3365	140	
	LumiPod-120-T-840-24	24	4000	80	3368	140	
	LumiPod-120-T-850-24	24	5000	80	3410	142	
150cm	LumiPod-120-SP-830-48	48	3000	80	6725	140	
	LumiPod-120-SP-840-48	48	4000	80	6735	140	
	LumiPod-120-SP-850-48	48	5000	80	6815	142	
	LumiPod-150-T-830-30	30	3000	80	4210	140	
	LumiPod-150-T-840-30	30	4000	80	4220	140	
175cm	LumiPod-150-T-850-30	30	5000	80	4265	142	
	LumiPod-150-SP-830-60	60	3000	80	8416	140	
	LumiPod-150-SP-840-60	60	4000	80	8440	140	
	LumiPod-150-SP-850-60	60	5000	80	8525	142	
	LumiPod-175-T-830-36	36	3000	80	5050	140	
	LumiPod-175-T-840-36	36	4000	80	5075	140	
	LumiPod-175-T-840-36	36	5000	80	5120	142	
	LumiPod-175-SP-830-72	72	3000	80	10100	140	
	LumiPod-175-SP-840-72	72	4000	80	10150	140	
	LumiPod-175-SP-840-72	72	5000	80	10240	142	


LumiPod- 2a up/down							
Length	Code	Watt	CCT	CRI	Lumen	Lm/W	
65cm	LumiPod-2a-65-T-830-18	18	3000	80	2524	140	
	LumiPod-2a-65-T-840-18	18	4000	80	2526	140	
	LumiPod-2a-65-T-850-18	18	5000	80	2556	142	
	LumiPod-2a-65-SP-830-36	36	3000	80	5047	140	
	LumiPod-2a-65-SP-840-36	36	4000	80	5052	140	
90cm	LumiPod-2a-65-SP-850-36	36	5000	80	5112	142	
	LumiPod-2a-90-T-830-27	27	3000	80	3789	140	
	LumiPod-2a-90-T-840-27	27	4000	80	3804	140	
	LumiPod-2a-90-T-850-27	27	5000	80	3837	142	
	LumiPod-2a-90-SP-830-54	54	3000	80	7578	140	
120cm	LumiPod-2a-90-SP-840-54	54	4000	80	7608	140	
	LumiPod-2a-90-SP-850-54	54	5000	80	7672	142	
	LumiPod-2a-120-T-830-36	36	3000	80	5048	140	
	LumiPod-2a-120-T-840-36	36	4000	80	5052	140	
	LumiPod-2a-120-T-850-36	36	5000	80	5115	142	
150cm	LumiPod-2a-120-SP-830-72	72	3000	80	10058	140	
	LumiPod-2a-120-SP-840-72	72	4000	80	10100	140	
	LumiPod-2a-120-SP-850-72	72	5000	80	10222	142	
	LumiPod-2a-150-T-830-45	45	3000	80	6315	140	
	LumiPod-2a-150-T-840-45	45	4000	80	6330	140	
175cm	LumiPod-2a-150-T-850-45	45	5000	80	6398	142	
	LumiPod-2a-150-SP-830-90	90	3000	80	12624	140	
	LumiPod-2a-150-SP-840-90	90	4000	80	12660	140	
	LumiPod-2a-150-SP-850-90	90	5000	80	12788	142	
	LumiPod-2a-175-T-830-54	54	3000	80	7575	140	
	LumiPod-2a-175-T-840-54	54	4000	80	7612	140	
	LumiPod-2a-175-T-840-54	54	5000	80	7680	142	
	LumiPod-2a-175-SP-830-108	108	3000	80	15150	140	
	LumiPod-2a-175-SP-840-108	108	4000	80	15225	140	
	LumiPod-2a-175-SP-840-108	108	5000	80	15360	142	

Polar Intensity Diagram


LumiPod 1-way

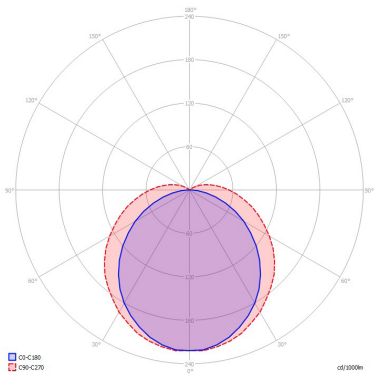

LumiPod 2a

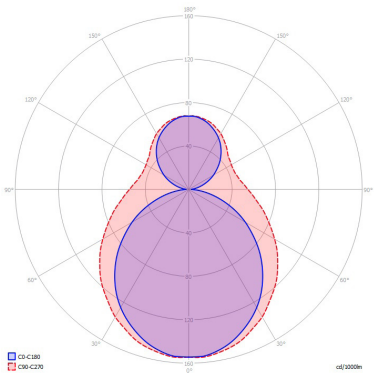

LumiPod 2b

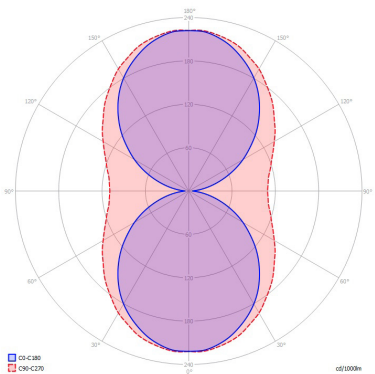

LumiPod- 2b up/down							
Length	Code	Watt	CCT	CRI	Lumen	Lm/W	
65cm	LumiPod-2b-65-T-830-24	24	3000	80	3366	140	
	LumiPod-2b-65-T-840-24	24	4000	80	3368	140	
	LumiPod-2b-65-T-850-24	24	5000	80	3408	142	
	LumiPod-2b-65-SP-830-48	48	3000	80	6730	140	
	LumiPod-2b-65-SP-840-48	48	4000	80	6736	140	
90cm	LumiPod-2b-65-SP-850-48	48	5000	80	6816	142	
	LumiPod-2b-90-T-830-36	36	3000	80	5052	140	
	LumiPod-2b-90-T-840-36	36	4000	80	5072	140	
	LumiPod-2b-90-T-850-36	36	5000	80	5116	142	
	LumiPod-2b-90-SP-830-72	72	3000	80	10104	140	
120cm	LumiPod-2b-90-SP-840-72	72	4000	80	10144	140	
	LumiPod-2b-90-SP-850-72	72	5000	80	10230	142	
	LumiPod-2b-120-T-830-38	48	3000	80	6730	140	
	LumiPod-2b-120-T-840-48	48	4000	80	6736	140	
	LumiPod-2b-120-T-850-48	48	5000	80	6820	142	
150cm	LumiPod-2b-120-SP-830-96	96	3000	80	13450	140	
	LumiPod-2b-120-SP-840-96	96	4000	80	13470	140	
	LumiPod-2b-120-SP-850-96	96	5000	80	13630	142	
	LumiPod-2b-150-T-830-60	60	3000	80	8420	140	
	LumiPod-2b-150-T-840-60	60	4000	80	8440	140	
175cm	LumiPod-2b-150-T-850-60	60	5000	80	8530	142	
	LumiPod-2b-150-SP-830-120	120	3000	80	16832	140	
	LumiPod-2b-150-SP-840-120	120	4000	80	16880	140	
	LumiPod-2b-150-SP-850-120	120	5000	80	17050	142	
	LumiPod-2b-175-T-830-72	72	3000	80	10100	140	
	LumiPod-2b-175-T-840-72	72	4000	80	10150	140	
	LumiPod-2b-175-T-840-72	72	5000	80	10240	142	
	LumiPod-2b-175-SP-830-144	144	3000	80	20200	140	
	LumiPod-2b-175-SP-840-144	144	4000	80	20300	140	
	LumiPod-2b-175-SP-840-144	144	5000	80	20480	142	

AFOI TSIOLAKI & SIA OE G.P.
Industrial Zone of Thessaloniki
Greece
T: +302310 798 335
F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

[facebook.com/techlumenledlightingen](https://www.facebook.com/techlumenledlightingen)
[@Techlumen](https://www.twitter.com/Techlumen)
[linkedin.com/company/tsiolakis-construction](https://www.linkedin.com/company/tsiolakis-construction)