



Rechargeable Linear LED

STIK-B Series

Techlumen **STIK-B** series are rechargeable battery-powered linear fixtures.

They have a slim profile offering uniform lighting.

They are made of aluminium and are extremely lightweight.

They are produced in 3000K, 4000K and 6500K, with CRI 85.

It is equipped with 4 NiMH batteries, with a cycle life of >3000 cycles.

It is rechargeable via a USB port.


Dimensions

90°

120°

60°

asym/batwing

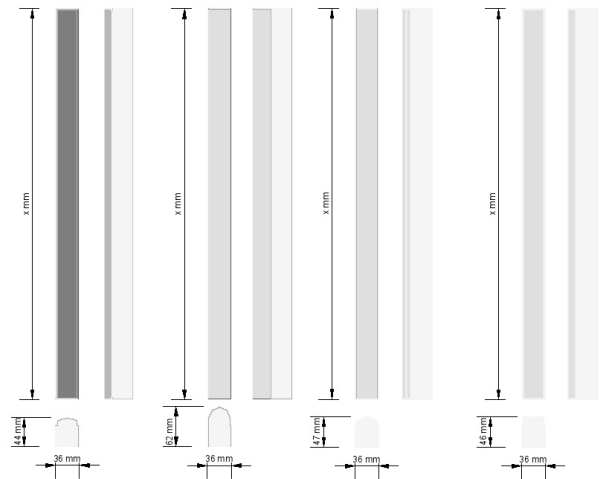

Manufactured in Greece



Applications

- Offices
- Retail
- Supermarket
- Warehouses
- Factories

Type	STIK-B
Luminous Flux	310 lm -1250 lm
Power	4W - 16W
Ambient Temperature	-30 °C - + 40 °C
CRI	85
CCT	3000K - 6500K
IP Rating	IP33
IK Rating	80
Body	Aluminium
Dimensions	34mm x 62mm x (400- 700)
Weight	1kg - 1.5kg
Warranty (LED)	5y
Compliances:	CE EN 55015:2019+A11:2020 EN 61547:2020 EN 62471:2008 EN 60950-1 EN 50581: 2012 Regulation 1194/2012 Directive (RoHS) 2011/65/EC Directive (EMC) 2014/30/EU EN 60950-1

STIK Versions					
Length	Code	Watt	CCT	CRI	Lumen
40cm	STIK-B-40-830-4	4	3000	85	310
	STIK-B-40-840-4	4	4000	85	310
	STIK-B-40-865-4	4	6500	85	310
	STIK-B-40-830-8	8	3000	85	620
	STIK-B-40-840-8	8	4000	85	620
	STIK-B-40-865-8	8	6500	85	620
60cm	STIK-B-60-830-6	6	3000	85	470
	STIK-B-60-840-6	6	4000	85	470
	STIK-B-60-865-6	6	6500	85	470
	STIK-B-60-830-12	12	3000	85	940
	STIK-B-60-840-12	12	4000	85	940
	STIK-B-60-865-12	12	6500	85	940
70cm	STIK-B-70-830-8	8	3000	85	625
	STIK-B-70-840-8	8	4000	85	625
	STIK-B-70-865-8	8	6500	85	625
	STIK-B-70-830-16	16	3000	85	1250
	STIK-B-70-840-16	16	4000	85	1250
	STIK-B-70-865-16	16	6500	85	1250






On/off Button






Charging USB port

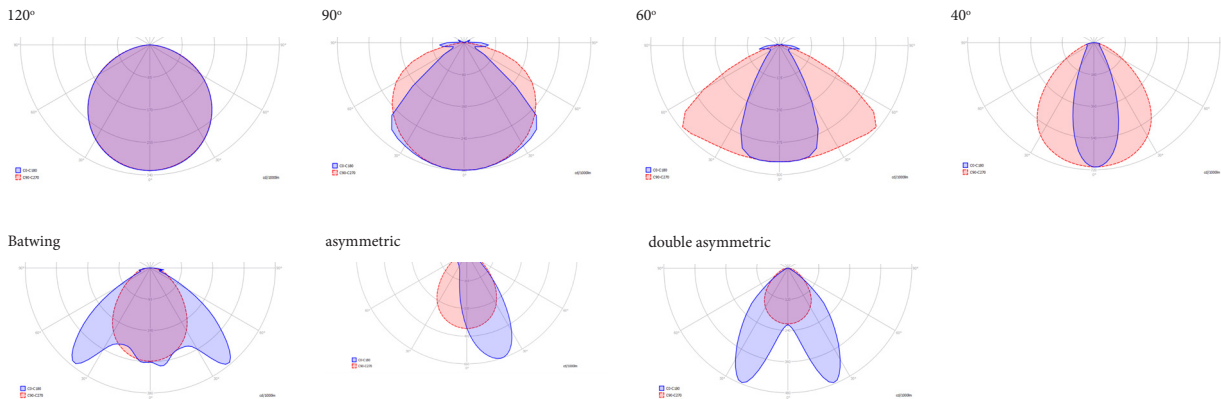Polar Intensity Diagram



AFOI TSIOLAKI & SIA OE G.P.
 Industrial Zone of Thessaloniki
 Greece
 T: +302310 798 335
 F: +302310 799 868

e-mail: info@techlumen.gr
www.techlumen.gr

 facebook.com/techlumenledlightingen
 [@Techlumen](https://twitter.com/Techlumen)
 linkedin.com/company/tsiolakis-construction