

## MEAT LIGHTING LINEAR LED

### VELISTI-M Series

**VELISTI-SP** series linear LED fixtures provide specialized spectrum lighting to promote meat products.


They are **IP67** rated and have **excellent durability**. They are made of anodized aluminum.

They are lightweight with thin profile. They are produced in various length and performance versions as well as 6 light beam versions to provide the ideal lighting solution in every case of height and installation grid density.


They are easily installed with a snap fit into their special fixing pieces.

They have a lumen maintenance factor of L80B10 > 70000 hours of operation.

VELISTI-M series LED fixtures has a factory **warranty of 5 years** which can be extended to **8 years**.

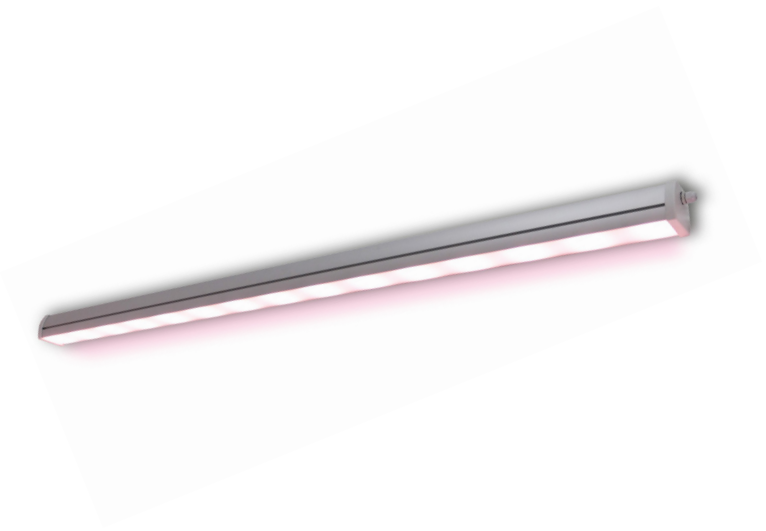

Dimensions

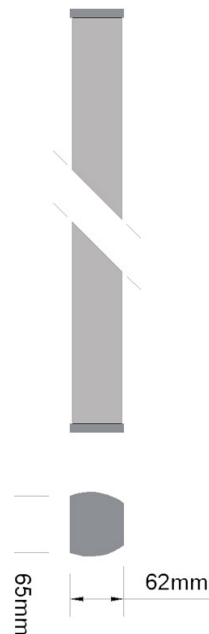

Manufactured in Greece







### Pros

- Low working temperature
- It produces little heat compared to other types of lighting
- Requires no maintenance
- Long life - 5 years warranty
- Easy installation
- High reliability
- Excellent performance with low power consumption
- High brightness
- High color rendering
- Instant start - immediate termination
- It does not emit UV or IR radiation
- Does not contain mercury
- Resistance to shock and vibration


Model	VELISTI-M
Luminus Power	640 lm - 3680 lm
Power	8.8 W - 50.6W
Driver	Tridonic
LED Chip	Tridonic
Consumption	0.009 - 0.052 KWh/h
Ambient Temperature	-30 °C - + 50 °C
Efficacy	73 lm/W
Power Factor	0,95
CRI	80
CCT	1750K
IP Rating	IP67
Body	IK09
Finishing	Anodized Aluminium
Dimensions	62mm x 65mm x (300 - 3000)mm
Light Beam	40° -120°, asym & batwing
Weight	0.6 - 4.5 Kg
Warranty	5 years
Approvals:	CE, EN 60598-1, EN 13032.01 EN 61439-1:2009 EN 61543:1995 2006/95/EC 2004/108/EC EN 60598-2-1 RohS REACH

VELISTI-M Versions					
Watt	Code	CCT	CRI	Lumen	Lm/W
<b>5.7W - 30cm</b>	VELISTI-30-M-9	1750	80	640	73
<b>15.4W - 60cm</b>	VELISTI-60-M-15	1750	80	1120	73
<b>17.6W - 80cm</b>	VELISTI-80-M-18	1750	80	1280	73
<b>22.0W - 100cm</b>	VELISTI-100-M-22	1750	80	1600	73
<b>26.4W - 120cm</b>	VELISTI-120-M-27	1750	80	1920	73
<b>33.0W - 145cm</b>	VELISTI-145-M-33	1750	80	2400	73
<b>39.6W - 170cm</b>	VELISTI-170-M-40	1750	80	2880	73
<b>46.2W - 200cm</b>	VELISTI-200-M-46	1750	80	3360	73
<b>50.6W - 225cm</b>	VELISTI-225-M-51	1750	80	3680	73


## Polar Intensity Diagram



asymmetric



Batwing



### AFOI TSIOLAKI OE

Industrial Zone of Thessaloniki  
Greece

T: +302310 798 335

F: +302310 799 868

e-mail: [info@techlumen.gr](mailto:info@techlumen.gr)

[www.techlumen.gr](http://www.techlumen.gr)



[facebook.com/Techlumen](https://facebook.com/Techlumen)



[@Techlumen](https://twitter.com/Techlumen)



[linkedin.com/company/tsiolakis-construction](https://linkedin.com/company/tsiolakis-construction)