

## Pathway LED Light



Techlumen© VOLA LED fixtures offer a discrete indirect lighting.

They are lightweight made from aluminium and can be painted in any RAL colour with excellet durability.

VOLA are produced in 6W, 9W and 12W versions. They are suitable for garden and path lighting.




bridgelux.






Dimensions

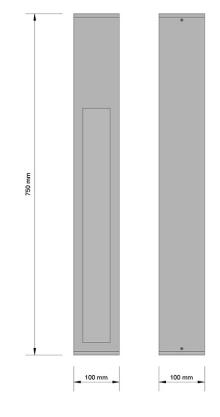

Туре	VOLA Series	VOLA ser	VOLA series Versions					
Luminus Power	592 lm - 1648 lm	Watt	Code	ССТ	CRI	Lumen	Lm/W	
Power	6W - 12W		VOLA-827-6	2700	80	592	98	
Ambient Temperature	-30 °C - + 50 °C		VOLA-830-6	3000	80	628	105	
Efficacy	98 - 141 lm/W	6W	VOLA-840-6	4000	80	656	110	
Power Factor	0,95		VOLA-850-6	5000	80	656	110	
CRI	70 - 80		VOLA-750-6	5000	70	692	115	
CCT	2700K - 6500K		VOLA-827-9	2700	80	1065	118	
IP Rating	IP65		VOLA-830-9	3000	80	1110	124	
Body	Aluminium		VOLA-835-9	3500	80	1144	128	
Finishing	Powder coationg / RAL selection		VOLA-840-9	4000	80	1155	129	
Dimensions	750mm x 100mm x 100mm	ЭW	VOLA-750-9	5000	70	1264	141	
Weight	1.9 Kg		VOLA-850-9	5000	80	1190	132	
Warranty	5 years		VOLA-757-9	5700	70	1220	136	
Compliances:	EN 60598-1:2014+AMD1:2017		VOLA-857-9	5700	80	1208	134	
	EN 60598-2-1:1979 +A1:1987		VOLA-765-9	6500	70	1242	138	
	EN 60598-2-3:2003 +A1:2011		VOLA-865-9	6500	80	1230	137	
	EN 55015:2006 + A1:2007 +A2:2009	12W	VOLA-827-12	2700	80	1414	118	
	EN 61547:2009		VOLA-830-12	3000	80	1472	123	
	EN 61000-3-2:2006 + A1:2009 +		VOLA-835-12	3500	80	1516	127	
	A2:2009		VOLA-840-12	4000	80	1532	128	
	EN 61000-3-3:2008		VOLA-750-12	5000	70	1677	140	
	EN 62778:2014 /EN 62471:2008		VOLA-850-12	5000	80	1577	132	
	Directive (LVD) -2006/95/EC		VOLA-757-12	5700	70	1618	135	
	Directive (EMC) -2004/108/EC		VOLA-857-12	5700	80	1602	134	
	Directive (RoHS) -2011/65/EC		VOLA-765-12	6500	70	1648	138	
	Directive (EuP) -2009/125/EC		VOLA-865-12	6500	80	1633	136	

Polar Intensity Diagram





in linkedin.com/company/tsiolakis-construction