



## Linear LED

### STIK Series

LED Techlumen **STIK** series have a slim profile offering uniform lighting


They are made of aluminium and are extremely lightweight.

They are produced in a great range of CCT, 2700K - 6500K and with CRI up to 90.

On-body button dimming is optional. They are produced in various lengths and in 7 versions of light distribution.

**All STIK series luminaires have 5 year warranty.**

### Dimensions

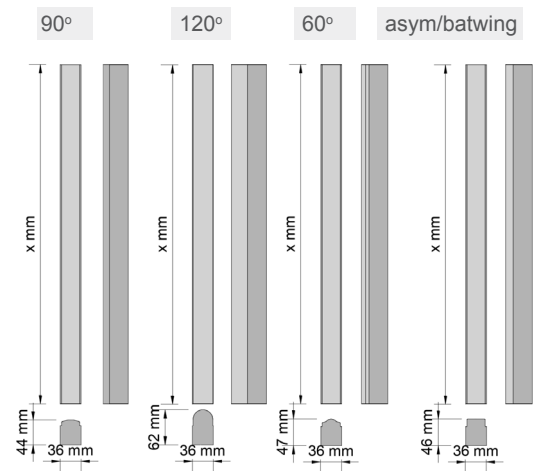

DALI



Manufactured in Greece




### Applications

- Offices
- Retail
- Supermarket
- Houses
- Workshops




### Polar Intensity Diagram


120°

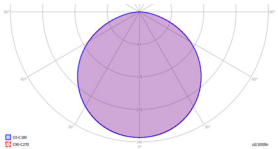


90°

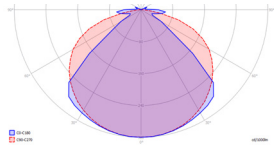


60°

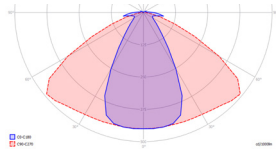


40°

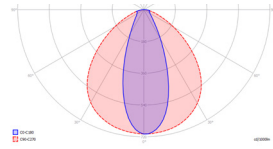


Batwing

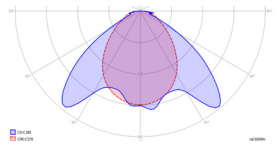

asymmetric

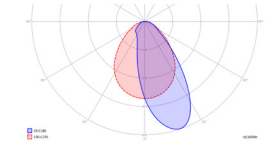


double asymmetric

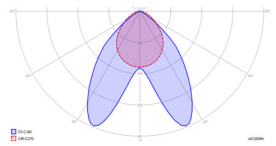


R120°



R90°

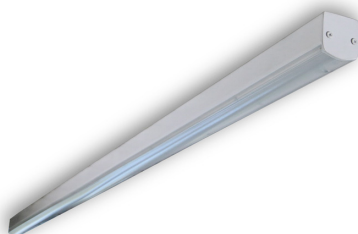

R60°

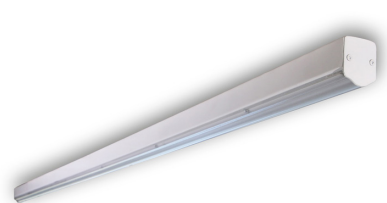

Wall mounted




Type	STIK
Luminous Flux	805 lm - 13568 lm
Power	6W - 75W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	134 - 181 lm/W
Power Factor	0,95
CRI	80
CCT	2700K - 6500K
IP Rating	IP20
IK Rating	IK06 / IK08
Body	Aluminium
Finishing	Powder coating - RAL color selection
Dimensions	36mm x44-62mm x (300-3520)mm
Weight	0.6 - 2.6 Kg
Warranty	5 years
Compliances	CE EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IECTR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

STIK Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
<b>30cm - 6W</b>	STIK-30-827-6	2700	80	1002	167	
	STIK-30-927-6	2700	90	805	134	
	STIK-30-830-6	3000	80	1025	171	
	STIK-30-930-6	3000	90	877	146	
	STIK-30-835-6	3500	80	1060	177	
	STIK-30-935-6	3500	90	900	150	
	STIK-30-840-6	4000	80	1087	181	
	STIK-30-940-6	4000	90	912	152	
	STIK-30-850-6	5000	80	1080	180	
	STIK-30-865-6	6500	80	1068	178	
	<b>45cm - 9W</b>	STIK-45-827-9	2700	80	1503	167
		STIK-45-927-9	2700	90	1208	134
STIK-45-830-9		3000	80	1538	171	
STIK-45-930-9		3000	90	1316	146	
STIK-45-835-9		3500	80	1590	177	
STIK-45-935-9		3500	90	1350	150	
STIK-45-840-9		4000	80	1631	181	
STIK-45-940-9		4000	90	1368	152	
STIK-45-850-9		5000	80	1620	180	
STIK-45-865-9		6500	80	1602	178	
<b>60cm - 12W</b>		STIK-60-827-12	2700	80	2004	167
		STIK-60-927-12	2700	90	1610	134
	STIK-60-830-12	3000	80	2050	171	
	STIK-60-930-12	3000	90	1754	146	
	STIK-60-835-12	3500	80	2120	177	
	STIK-60-935-12	3500	90	1800	150	
	STIK-60-840-12	4000	80	2174	181	
	STIK-60-940-12	4000	90	1824	152	
	STIK-60-850-12	5000	80	2160	180	
	STIK-60-865-12	6500	80	2136	178	
	<b>72cm - 15W</b>	STIK-72-827-15	2700	80	2505	167
		STIK-72-927-15	2700	90	2013	134
STIK-72-830-15		3000	80	2563	171	
STIK-72-930-15		3000	90	2193	146	
STIK-72-835-15		3500	80	2650	177	
STIK-72-935-15		3500	90	2250	150	
STIK-72-840-15		4000	80	2718	181	
STIK-72-940-15		4000	90	2280	152	
STIK-72-850-15		5000	80	2700	180	
STIK-72-865-15		6500	80	2670	178	
<b>85cm - 18W</b>		STIK-85-827-18	2700	80	3006	167
		STIK-85-927-18	2700	90	2415	134
	STIK-85-830-18	3000	80	3075	171	
	STIK-85-930-18	3000	90	2631	146	
	STIK-85-835-18	3500	80	3180	177	
	STIK-85-935-18	3500	90	2700	150	
	STIK-85-840-18	4000	80	3261	181	
	STIK-85-940-18	4000	90	2736	152	
	STIK-85-850-18	5000	80	3240	180	
	STIK-85-865-18	6500	80	3204	178	
	<b>100cm - 21W</b>	STIK-100-827-21	2700	80	3507	167
		STIK-100-927-21	2700	90	2818	134
STIK-100-830-21		3000	80	3588	171	
STIK-100-930-21		3000	90	3070	146	
STIK-100-835-21		3500	80	3710	177	
STIK-100-935-21		3500	90	3150	150	
STIK-100-840-21		4000	80	3805	181	
STIK-100-940-21		4000	90	3192	152	
STIK-100-850-21		5000	80	3780	180	
STIK-100-865-21		6500	80	3738	178	
<b>115cm - 24W</b>		STIK-115-827-24	2700	80	4008	167
		STIK-115-927-24	2700	90	3220	134
	STIK-115-830-24	3000	80	4100	171	
	STIK-115-930-24	3000	90	3508	146	
	STIK-115-835-24	3500	80	4240	177	
	STIK-115-935-24	3500	90	3600	150	
	STIK-115-840-24	4000	80	4348	181	
	STIK-115-940-24	4000	90	3648	152	
	STIK-115-850-24	5000	80	4320	180	
	STIK-115-865-24	6500	80	4272	178	
	<b>128cm - 27W</b>	STIK-128-827-27	2700	80	4509	167
		STIK-128-927-27	2700	90	3623	134
STIK-128-830-27		3000	80	4613	171	
STIK-128-930-27		3000	90	3947	146	
STIK-128-835-27		3500	80	4770	177	
STIK-128-935-27		3500	90	4050	150	
STIK-128-840-27		4000	80	4892	181	
STIK-128-940-27		4000	90	4104	152	
STIK-128-850-27		5000	80	4860	180	
STIK-128-865-27		6500	80	4806	178	
<b>142cm - 30W</b>		STIK-142-827-30	2700	80	5010	167
		STIK-142-927-30	2700	90	4025	134
	STIK-142-830-30	3000	80	5125	171	
	STIK-142-930-30	3000	90	4385	146	
	STIK-142-835-30	3500	80	5300	177	
	STIK-142-935-30	3500	90	4500	150	
	STIK-142-840-30	4000	80	5435	181	
	STIK-142-940-30	4000	90	4560	152	
	STIK-142-850-30	5000	80	5400	180	
	STIK-142-865-30	6500	80	5340	178	
	<b>155cm - 33W</b>	STIK-155-827-33	2700	80	5511	167
		STIK-155-927-33	2700	90	4428	134
STIK-155-830-33		3000	80	5638	171	
STIK-155-930-33		3000	90	4624	146	
STIK-155-835-33		3500	80	5830	177	
STIK-155-935-33		3500	90	4950	150	
STIK-155-840-33		4000	80	5979	181	
STIK-155-940-33		4000	90	5016	152	
STIK-155-850-33		5000	80	5940	180	
STIK-155-865-33		6500	80	5874	178	
<b>170cm - 36W</b>		STIK-170-827-36	2700	80	6012	167
		STIK-170-927-36	2700	90	4830	134
	STIK-170-830-36	3000	80	6150	171	
	STIK-170-930-36	3000	90	5262	146	
	STIK-170-835-36	3500	80	6360	177	
	STIK-170-935-36	3500	90	5400	150	
	STIK-170-840-36	4000	80	6522	181	
	STIK-170-940-36	4000	90	5472	152	
	STIK-170-850-36	5000	80	6480	180	
	STIK-170-865-36	6500	80	6408	178	
	<b>185cm - 39W</b>	STIK-185-827-39	2700	80	6513	167
		STIK-185-927-39	2700	90	5233	134
STIK-185-830-39		3000	80	6663	171	
STIK-185-930-39		3000	90	5701	146	
STIK-185-835-39		3500	80	6890	177	
STIK-185-935-39		3500	90	5850	150	
STIK-185-840-39		4000	80	7066	181	
STIK-185-940-39		4000	90	5928	152	
STIK-185-850-39		5000	80	7020	180	
STIK-185-865-39		6500	80	6942	178	

STIK Versions						
Watt	Code	CCT	CRI	Lumen	Lm/W	
<b>200cm - 42W</b>	STIK-200-827-42	2700	80	7014	167	
	STIK-200-927-42	2700	90	5635	134	
	STIK-200-830-42	3000	80	7175	171	
	STIK-200-930-42	3000	90	6139	146	
	STIK-200-835-42	3500	80	7420	177	
	STIK-200-935-42	3500	90	6300	150	
	STIK-200-840-42	4000	80	7609	181	
	STIK-200-940-42	4000	90	6384	152	
	STIK-200-850-42	5000	80	7560	180	
	STIK-200-865-42	6500	80	7476	178	
	<b>212cm - 45W</b>	STIK-212-827-45	2700	80	7515	167
		STIK-212-927-45	2700	90	6038	134
STIK-212-830-45		3000	80	7688	171	
STIK-212-930-45		3000	90	6578	146	
STIK-212-835-45		3500	80	7950	177	
STIK-212-935-45		3500	90	6750	150	
STIK-212-840-45		4000	80	8153	181	
STIK-212-940-45		4000	90	6840	152	
STIK-212-850-45		5000	80	8100	180	
STIK-212-865-45		6500	80	8010	178	
<b>225cm - 48W</b>		STIK-225-827-48	2700	80	8016	167
		STIK-225-927-48	2700	90	6440	134
	STIK-225-830-48	3000	80	8200	171	
	STIK-225-930-48	3000	90	7016	146	
	STIK-225-835-48	3500	80	8480	177	
	STIK-225-935-48	3500	90	7200	150	
	STIK-225-840-48	4000	80	8696	181	
	STIK-225-940-48	4000	90	7296	152	
	STIK-225-850-48	5000	80	8640	180	
	STIK-225-865-48	6500	80	8544	178	
	<b>240cm - 51W</b>	STIK-240-827-51	2700	80	8517	167
		STIK-240-927-51	2700	90	6843	134
STIK-240-830-51		3000	80	8713	171	
STIK-240-930-51		3000	90	7455	146	
STIK-240-835-51		3500	80	9010	177	
STIK-240-935-51		3500	90	7650	150	
STIK-240-840-51		4000	80	9240	181	
STIK-240-940-51		4000	90	7752	152	
STIK-240-850-51		5000	80	9180	180	
STIK-240-865-51		6500	80	9078	178	
<b>255cm - 54W</b>		STIK-255-827-54	2700	80	9018	167
		STIK-255-927-54	2700	90	7245	134
	STIK-255-830-54	3000	80	9225	171	
	STIK-255-930-54	3000	90	7893	146	
	STIK-255-835-54	3500	80	9540	177	
	STIK-255-935-54	3500	90	8100	150	
	STIK-255-840-54	4000	80	9783	181	
	STIK-255-940-54	4000	90	8208	152	
	STIK-255-850-54	5000	80	9720	180	
	STIK-255-865-54	6500	80	9612	178	
	<b>270cm - 57W</b>	STIK-270-827-57	2700	80	9519	167
		STIK-270-927-57	2700	90	7648	134
STIK-270-830-57		3000	80	9738	171	
STIK-270-930-57		3000	90	8332	146	
STIK-270-835-57		3500	80	10070	177	

## Accessories / Options

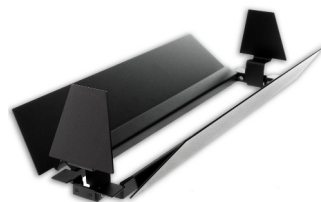

Barn door



Track Version - Stucchi / Global in-track driver

Wall mounted



**AFOI TSIOLAKI & SIA OE G.P.**  
Industrial Zone of Thessaloniki  
Greece  
T: +302310 798 335  
F: +302310 799 868

e-mail: [info@techlumen.gr](mailto:info@techlumen.gr)  
[www.techlumen.gr](http://www.techlumen.gr)

 [facebook.com/techlumenledlightingen](https://facebook.com/techlumenledlightingen)

 [@Techlumen](https://twitter.com/Techlumen)

 [linkedin.com/company/tsiolakis-construction](https://linkedin.com/company/tsiolakis-construction)