

## LED FLOORSTANDING

### ORFI Series

ORFI series LED floorstanding lights provide powerful and energy-efficient lighting for workspaces.



They are produced in various power versions. They are dimmable. Also PIR occupancy sensors are optional.

They have a 5 year warranty.

DIMMABLE



#### Dimensions

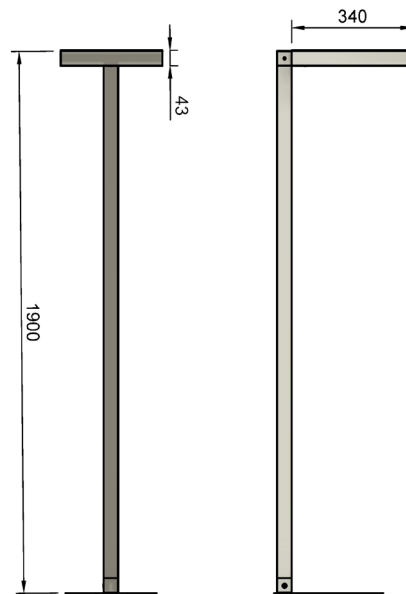

Manufactured in Greece




#### Applications

- Offices
- Workstations


Type	ORFI
Luminous Flux	1690 lm - 21300 lm
Power	11W - 120W
Ambient Temperature	-30oC - +50oC
Efficacy	151 - 185 lm/W
Power Factor	0,95
CRI	80 (90 is optional)
CCT	3000K - 5000K
IP Rating	IP33
IK Rating	IK07
Body	Aluminium
Finishing	Powder Coating - RAL selection
Dimensions	340 x 280 x 1900 mm
Weight	12 Kg
Warranty	5 years
Compliances	EN 60598-1:2008 +A11:2009 EN 60598-2-2 EN 50581 EN 61000-3-2:2006 + A1:2009 + A2:2009 EN 61547:2009 EN 55015:2006 + A1:2007 +A2:2009 EN 61000-3-3:2008 EN 62471:2008 IEC 62778 EN 62493:2010 2011/65/EC (Rohs) 2009/125/EC (EuP) 2006/95/EC (LVD) 2004/108/EC (EMC)

ORFI Versions					
Watt	Code	CCT	CRI	Lumen	Lm/W
<b>12W</b>	ORFI-830-12	3000	80	1690	153
	ORFI-840-12	4000	80	1755	159
	ORFI-850-12	5000	80	1765	160
<b>17W</b>	ORFI-830-17	3000	80	2415	151
	ORFI-840-17	4000	80	2510	156
	ORFI-850-17	5000	80	2530	158
<b>34W</b>	ORFI-830-34	3000	80	5874	173
	ORFI-840-34	4000	80	6150	181
	ORFI-850-34	5000	80	6270	185
<b>60W</b>	ORFI-830-60	3000	80	10521	176
	ORFI-840-60	4000	80	10550	176
	ORFI-850-60	5000	80	10658	178
<b>120W</b>	ORFI-830-120	3000	80	21025	176
	ORFI-840-120	4000	80	21050	176
	ORFI-850-120	5000	80	21300	178

Opal

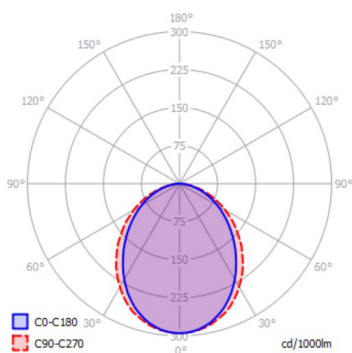

Microprismatic - Low UGR

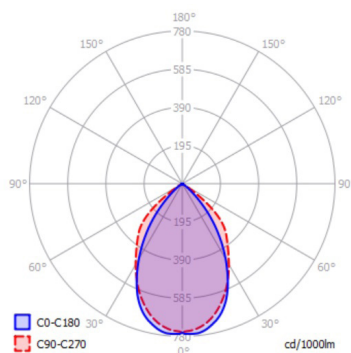

**AFOI TSIOLAKI OE**

Industrial Zone of Thessaloniki  
Greece

T: +302310 798 335  
F: +302310 799 868

e-mail: [info@techlumen.gr](mailto:info@techlumen.gr)  
[www.techlumen.gr](http://www.techlumen.gr)

[facebook.com/techlumenledlightingen](https://facebook.com/techlumenledlightingen)

@Techlumen

[linkedin.com/company/tsiolakis-construction](https://linkedin.com/company/tsiolakis-construction)