

IP65 LED WALL SPOT

OCULUS Series

OCULUS LED spots provide high quality energy efficient lighting.

They are produced at 3W versions with CCT range 2700K - 5000K.

They can be install in interior or exterior walls and provide a low glare discrete lighting.

They are made of aluminium with IP65 rating and IK10 rating.

Thet are painted with powder coating in a vast selection of colours


DALI 0-10V Em 3h BLUE TOOTH



Manufactured in Greece




Dimensions






Polar Intensity Diagram

Type A

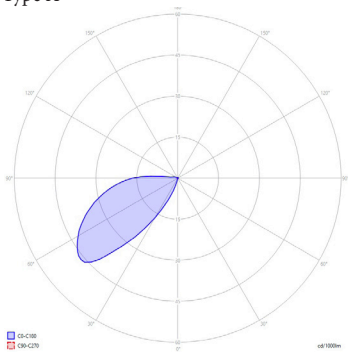

Type B

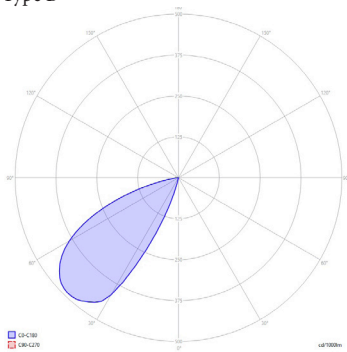

Type	OCULUS
Luminous Flux	320 lm - 475 lm
Power	3W
Ambient Temperature	-30 °C - + 50 °C
Efficacy	107 - 158 lm/W
CRI	80-90
CCT	2700K - 5000K
IP Rating	IP65
IK Rating	IK10
Body	Aluminium
Finishing	Powder Coating
Dimensions	Ø50 X 57mm
Casing diameter	Ø43
Weight	0.35 Kg
Warranty	5 years
Compliances	EN 60598-1:2021+A11:2022 EN 60598-2-1:2022 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN 61547:2020 EN 55015:2019+A11:2020 EN 62471:2008 IEC/TR 62778:2014 EN 62493:2015+A1:2022 EN 63000:2018 Directive (LVD) 2014/35/EU Directive (EMC) 2014/30/EU Directive (RoHS) 2011/65/EC Directive (REACH) 2015/863/EU Directive (GPS) 2015/863/EU Directive (EuP) 2001/95/EC

OCULUS Versions					
Watt	Code	CCT	CRI	Lumen	Lm/W
3W	OCULUS-827-3	2700K	80	455	152
	OCULUS-830-3	3000K	80	465	155
	OCULUS-835-3	3500K	80	470	157
	OCULUS-840-3	4000K	80	475	158
	OCULUS-850-3	5000K	80	460	153
	OCULUS-927-3	2700K	90	320	107
	OCULUS-930-3	3000K	90	335	112
	OCULUS-935-3	3500K	90	350	117
	OCULUS-940-3	4000K	90	360	120
	OCULUS-950-3	5000K	90	375	125

AFOI TSIOLAKI & SIA OE G.P.

Industrial Zone of Thessaloniki
Greece

T: +302310 798 335

F: +302310 799 868

e-mail: info@techlumen.gr

www.techlumen.gr



facebook.com/Techlumen



[@Techlumen](https://twitter.com/Techlumen)



linkedin.com/company/tsiolakis-construction